



ROTOURBAN 1200

REAR LOAD CONTAINER

www.rototank.com

To Improve your city





TECHNICAL SPECIFICATIONS

REAR LOAD CONTAINER 1200L.



- Manufactured using the rotational molding system with UV-stabilized high-density polyethylene.
- Side-pin lifting system.
- Soft-close user lid for general and organic waste.
- Special openings for paper-cardboard, glass, and packaging.
- 200 mm diameter wheels with brake system.
- Integrated handles in the body.
- Option to manufacture the container and lids in any color.
- Accessibility: user opening at a height below 1,200 mm.
- Easy to clean thanks to its smooth surface.
- Environmentally friendly.
- Easy waste discharge.
- Flexible, durable, and low-maintenance.

SPECIFICATION	VALUE
Capacity (L)	1200
Maximum allowable load (kg)	500
Material	Rotomoulded HDPE
Weight (kg)	65
Width between lifting pockets (A - mm)	1270
Total depth (C - mm)	1090
Total height (B - mm)	1395
User mouth height (B1 - mm)	<1200
Maximum container width (A1 - mm)	1370
Minimum container width (A2 - mm)	1040
Minimum depth (C1 - mm)	850
Wheel diameter (R - mm)	200

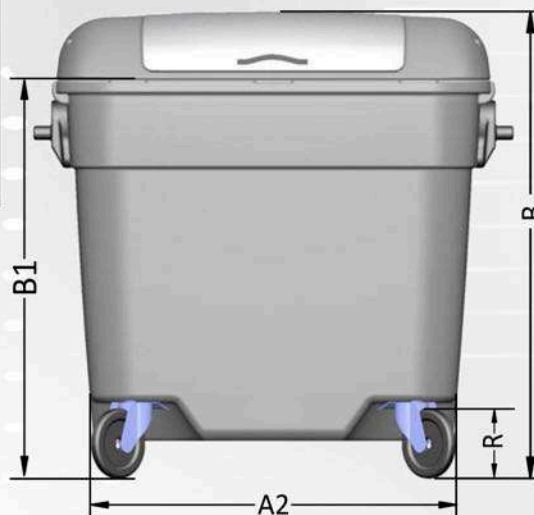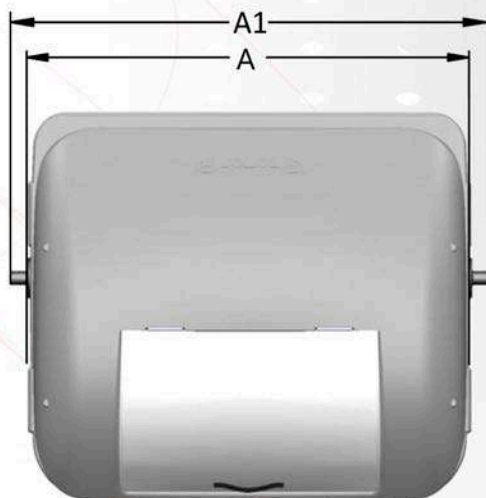

- Standard UNE-EN 840 – Mobile waste and recycling containers
- Standard UNE-EN 170001-1:2007 – Universal Accessibility. DALCO criteria for facilitating accessibility to the environment
- CE Marking

