



ROUND IGLOO 2500

BILATERAL COLLECTION WITH DOUBLE HOOK

www.rototank.com

To Improve Your City



TECHNICAL DATA SHEET

IGLOO 2500L.







- High-density polyethylene.
- High resistance thanks to its manufacturing process.
- 2,500-liter capacity.
- Easy to clean due to its smooth finish, with no surface textures or recesses.
- Double-wall lids.
- Available for all selective waste fractions.
- Equipped with a double-hook lifting system.

Model	Igloo 2500
Nominal Volume (L)	2500
Total Height, B (mm)	1800
Total Depth, C (mm)	1620
User Opening Height (mm)	< 1300



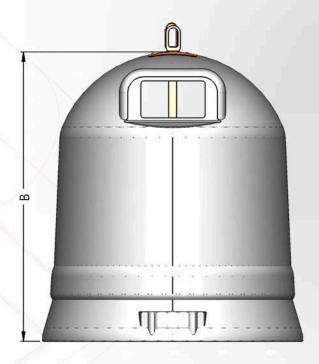



- Standard UNE-EN 13071-1. Fixed waste containers with capacity up to 5000L, top-lifted and bottom-emptied.
- Directive 2000/14/EC on noise emissions in the environment by equipment for use outdoors.
- CE marking.
- Standard UNE-EN 170001-1:2007. Universal Accessibility. DALCO criteria to facilitate accessibility to the environment.

