



# ROTOURBAN 3000-2000

Rotomoulded side-loading container

[www.rototank.com](http://www.rototank.com)

To Improve your city






# TECHNICAL SHEET

ROTOURBAN 3000L. and 2000L.



- Manufactured by rotational molding system with high density polyethylene stabilised UV.
- Maximum height of 1.600 mm allowing a better visibility of vehicles and pedestrians.
- Accessibility. User openings at a height of less than 1.200 mm.
- User lid soft opening kit by pedal.
- Larger discharge surface for an easy evacuation of the waste
- Centering guide to position the container on the street.
- Possibility of manufacturing containers and lids in any color.
- Easy cleaning thanks to its smooth surface.
- Electronic user control system with lock, RFID cards and filling volumetric control.
- Respect for the environment.
- Flexible, resistant and low maintenance.

| MODEL                           | ROTOURBAN 3000  | ROTOURBAN 2000 |
|---------------------------------|-----------------|----------------|
| Nominal volume (L)              | 3.000           | 2.000          |
| Max. Load admissible (kg)       | 1.200           | 800            |
| Material                        | HDPE ROTOMOLDED |                |
| Total width (A) mm.             | 1.760           | 1.270          |
| Total depth (B) mm.             | 1.510           | 1.510          |
| Total height (C) mm.            | 1.600           | 1.600          |
| Height of the user opening (mm) | <1200           |                |

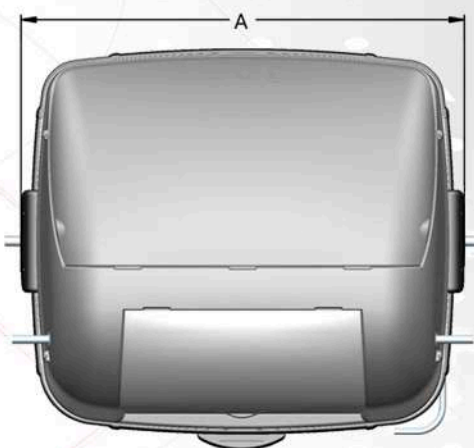

- Standard UNE-EN 12574-1. Fixed containers for waste Dimensions and design
- Standard UNE-EN 12574-2. Fixed containers for waste Performance requirements test methods
- Standard UNE-EN 12574-3. Fixed containers for waste Safety and hygiene requirements
- Directive 2000/14/EC on noise emission in the environment by equipment for use outdoors.
- CE marking
- Standard UNE-EN 170001-1:2007 Universal Accessibility. DALCO criteria to facilitate accessibility to the environment.
- ISO 9001 and ISO 14001.

