



# ROTOGLOBE 4600-3000-2000

BILATERAL DOUBLE HOOK OR KINSHOFER PICK-UP

[www.rototank.com](http://www.rototank.com)

To improve your city





# TECHNICAL DATA SHEET

## ROTOGLOBE 4600-3000-2000 L.





- High-density polyethylene.
- High resistance thanks to its manufacturing process.
- Available in 4,600, 3,000, and 2,000-liter capacities.
- Easy to clean due to its smooth finish, without surface textures or crevices.
- User lid and double-wall flaps.
- Large leachate retention tray.
- Available for all waste fractions.
- Light packaging version with 400 mm inlets.
- Optional foot pedal.
- Alignment system available for public roads.
- Compatible with VACRI system for lifting small two-wheeled bins.

Model	Rotoglobe 2000	Rotoglobe 3000	Rotoglobe 4600
Nominal Volume (L)	2000	3000	4600
Maximum allowable load (kg)	800	1000	1800
Total height, B (mm)	1630	1630	1630
Total length, A (mm)	1300	1600	2200
Total depth, C (mm)	1650	1650	1650
User mouth height (mm)	<1200		
Total gate opening	1300		



Its lifting system can be bilateral Kinshofer, double hook, or adaptable to any system on the market.

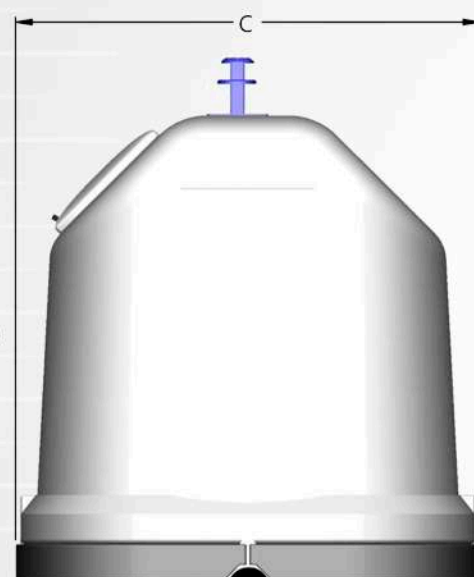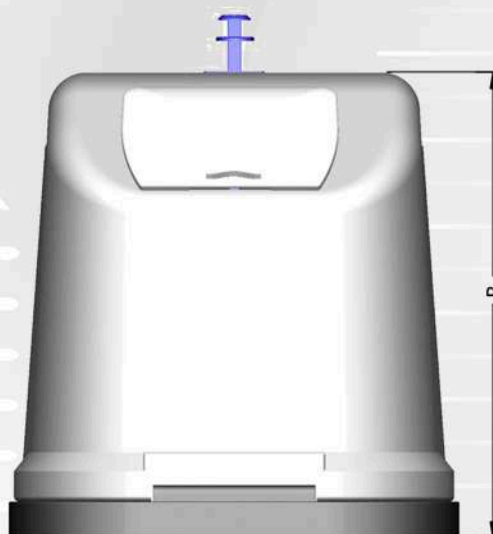

CENTERING GUIDE

UNE-EN 13071-1 standard. Fixed waste containers with a capacity up to 5000L, lifted from the top and emptied from the bottom.

DIRECTIVE 2000/14/EC on noise emissions in the environment by equipment for use outdoors.

CE marking.

UNE 170001-1:2007 standard. Universal Accessibility. DALCO criteria to facilitate accessibility to the environment.

ISO 9001  
ISO 14001  
OHSAS 18001  
BUREAU VERITAS  
Certification

